

Sani Floor®

Standard • Clog-Free • Self-Washing

FLOOR TROUGHS

Project #: _____

Item #: _____

AMA File #:


CLOG-FREE FLOOR TROUGHS with HIGH CAPACITY STRAINER TRAY

Sani Floor's Clog-Free Floor Troughs are uniquely designed to provide superior straining capacity of food debris. Ordinary floor trough designs only have one 6" (152) diameter strainer basket. Sani Floor's high capacity strainer tray runs continuously through the bottom of the trough. Water from food waste and surrounding areas percolates through the strainers, eliminating dams and strainer clogs, and allows drain water to flow freely to the building drain. Our strainer trays are designed to catch food solids and particulate matter as small as a grain of rice.

Why is this so important?

- ▶ Virtually eliminates building drain clogs. No more building maintenance service calls
- ▶ Fewer clogs mean no trough overflow and leaks through surrounding tile and grout
- ▶ Significantly decreases the amount of sediment entering grease traps; grease traps will work more efficiently
- ▶ Decreased sediments reduce grease trap clogs and extends service intervals
- ▶ Better housekeeping
- ▶ No free standing water
- ▶ Minimizes slips and falls

Clog-Free Floor Troughs have a unique basin design also. The sides are sloped a minimum of 10° to the bottom of the trough to direct debris to the full length strainer tray. Depth of the troughs range from 5 1/8" (130) to 9" (229) to accommodate high volume water areas such as kettle lines and dish rooms. Grates are fiberglass reinforced resin anti-slip with an integral flex built in to provide anti-fatigue benefit. Grates are removable and can be cleaned in conveyor or door type dish machines. Weight capacity ranges from 1425 lbs (646 kg) to 2665 lbs (1209 kg) per grate.

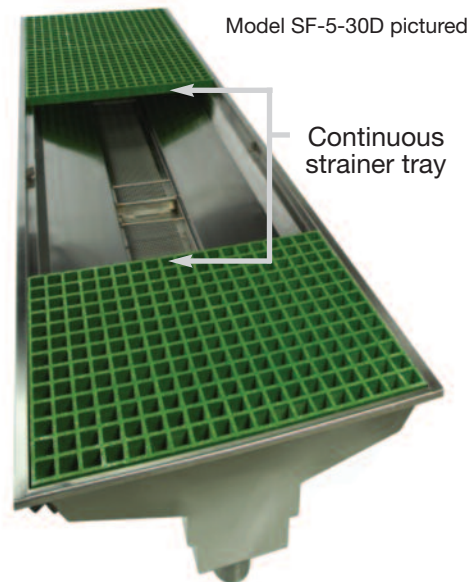

Specifications

Floor modules to be constructed of 16 gauge stainless steel with 2B finish; designed in compliance and certified with all applicable NSF and NFSI standards. Trough contains unique grout locking holes spaced every 1 3/8" (35) around outside perimeter. Trough pan sides to be sloped towards center collection strainer tray at an angle no less than 10°. Pan to have a 1" (25) pitch to end drain. 3 1/2" (89) end drain to mate to 3" (76) no hub connection to grease interceptor. Trough to include 4-6 threaded leveling legs to ease installation process. Full length stainless steel strainer trays to have 1/16" (2) perforated, slotted opening pattern with handles on both ends. Maximum strainer tray length is 5 feet (1.52 m) long. Walking surface to be fiberglass reinforced resin anti-slip grating with integral flex to provide anti-fatigue benefit. Non-slip grate coating to be alumina grit. Grate size to be 19 5/8" x 28 3/4" x 1" (498 x 730 x 25) or 19 5/8" x 34 3/4" x 1 1/2" (498 x 883 x 38). Weight capacity ranges from 1425 lbs (646 kg) to 2665 lbs (1209 kg) per grate. Floor module to be in lengths of 21" (533) to 139 3/8" (3540) as specified. Unit widths to be 21 3/4" (552), 30 7/8" (784), or 36 7/8" (937). Depth to range from 5 1/8" (130) to 9" (229).



"USGBC" and related logo is a trademark owned by the U.S. Green Building Council and is used by permission.

SANI-FLOOR, LLC.

4900 West Electric Ave. • West Milwaukee, WI 53219
phone 866.895.7264 • fax 414.902.6564 • e-mail info@sanifloor.com

www.sanifloor.com

Specification #:

SaniFloor®

Standard • Clog-Free • Self-Washing



FLOOR TROUGHS

Project #: _____

Item #: _____

Model	Width (A)	Length (B)	Standard Depth	Min. Standard Depth	Standard Depression *	Shallow Depth	Min. Shallow Depth	Shallow Depression *	# of Grates
SF-1-22D	21 3/4" (552)	30 1/8" (765)	7 1/8" (181)	7 5/8" (194)	5 1/8" (130)	5 5/8" (143)	1		
SF-2-22D	21 3/4" (552)	58 15/16" (1497)	7 1/8" (181)	7 5/8" (194)	5 1/8" (130)	5 5/8" (143)	2		
SF-3-22D	21 3/4" (552)	87 3/4" (2229)	7 1/8" (181)	7 5/8" (194)	5 1/8" (130)	5 5/8" (143)	3		
SF-4-22D	21 3/4" (552)	116 11/16" (2964)	7 1/8" (181)	7 5/8" (194)	5 1/8" (130)	5 5/8" (143)	4		
SF-1-30D	30 7/8" (784)	21" (533)	8" (203)	8 1/2" (216)	6" (152)	6 1/2" (165)	1		
SF-2-30D	30 7/8" (784)	40 11/16" (1033)	8" (203)	8 1/2" (216)	6" (152)	6 1/2" (165)	2		
SF-3-30D	30 7/8" (784)	60 3/8" (1534)	8" (203)	8 1/2" (216)	6" (152)	6 1/2" (165)	3		
SF-4-30D	30 7/8" (784)	80 3/16" (2037)	8" (203)	8 1/2" (216)	6" (152)	6 1/2" (165)	4		
SF-5-30D	30 7/8" (784)	99 7/8" (2537)	8" (203)	8 1/2" (216)	6" (152)	6 1/2" (165)	5		
SF-6-30D	30 7/8" (784)	119 9/16" (3037)	8" (203)	8 1/2" (216)	6" (152)	6 1/2" (165)	6		
SF-7-30D	30 7/8" (784)	139 3/8" (3540)	8" (203)	8 1/2" (216)	6" (152)	6 1/2" (165)	7		
SF-1-36D	36 7/8" (937)	21" (533)	9" (229)	9 1/2" (241)	7" (178)	7 1/2" (191)	1		
SF-2-36D	36 7/8" (937)	40 11/16" (1033)	9" (229)	9 1/2" (241)	7" (178)	7 1/2" (191)	2		
SF-3-36D	36 7/8" (937)	60 3/8" (1534)	9" (229)	9 1/2" (241)	7" (178)	7 1/2" (191)	3		
SF-4-36D	36 7/8" (937)	80 3/16" (2037)	9" (229)	9 1/2" (241)	7" (178)	7 1/2" (191)	4		
SF-5-36D	36 7/8" (937)	99 7/8" (2537)	9" (229)	9 1/2" (241)	7" (178)	7 1/2" (191)	5		
SF-6-36D	36 7/8" (937)	119 9/16" (3037)	9" (229)	9 1/2" (241)	7" (178)	7 1/2" (191)	6		
SF-7-36D	36 7/8" (937)	139 3/8" (3540)	9" (229)	9 1/2" (241)	7" (178)	7 1/2" (191)	7		

*from finished floor elevation

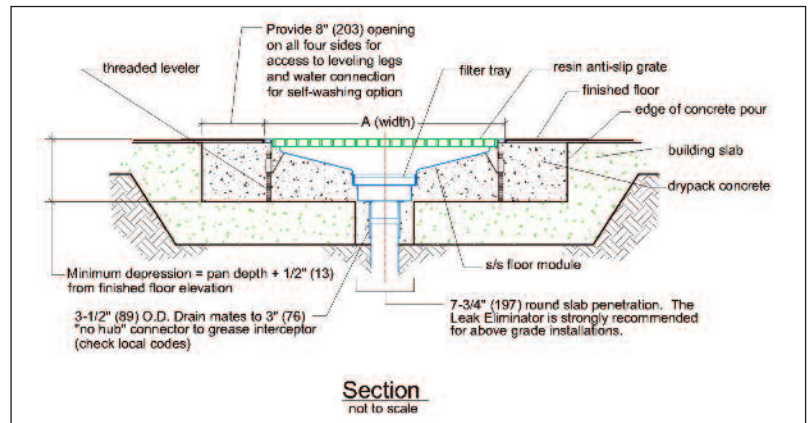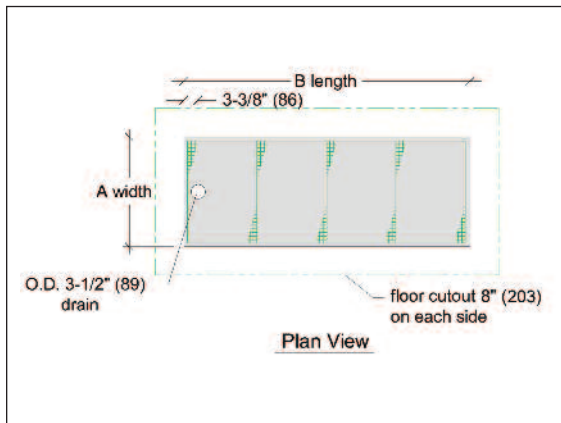

Options:

- | | | |
|--|---|--|
| <ul style="list-style-type: none"> <input type="checkbox"/> 14 Gauge Stainless Steel <input type="checkbox"/> Anti-Leak Drip Skirt <input type="checkbox"/> Shallow Depth <input type="checkbox"/> Removable Braces for High-Load Applications <input type="checkbox"/> Stainless Steel Drain Pan (see specification sheet) <input type="checkbox"/> Trough Leak Eliminator, patent pending (see specification sheet) <input type="checkbox"/> Self-Washing (see specification sheet) | <ul style="list-style-type: none"> Fiberglass Grating (Green is Standard) <input type="checkbox"/> Black <input type="checkbox"/> Gray <input type="checkbox"/> Red <input type="checkbox"/> Yellow <input type="checkbox"/> Stainless Steel Grating <input type="checkbox"/> ADA Grating <input type="checkbox"/> 1/2"x1/2" (13x13) spacing <input type="checkbox"/> Heavy Duty Fiberglass Grating <input type="checkbox"/> Standard Correctional Package with 1 1/2" (38) grates <input type="checkbox"/> Lockdown Correctional Package with 1 1/2" (38) lockdown grates | <ul style="list-style-type: none"> <input type="checkbox"/> Pultruded Fiberglass Grating <input type="checkbox"/> Contact factory for custom sizes |
|--|---|--|



SANI-FLOOR, LLC.

4900 West Electric Ave. • West Milwaukee, WI 53219
 phone 866.895.7264 • fax 414.902.6564 • e-mail info@sanifloor.com

www.sanifloor.com